


CNC HEAVY DUTY VERTICAL TURNING LATHE

CNC Heavy Duty Vertical Turning Lathe has a perfect combination of the up-to-date design, advanced high technology and fully skilled SANGNIM MSP's engineering. This machine consists of column, turning table, base, crossrail, crossbeam, turning and milling head, accessories and CNC control system.



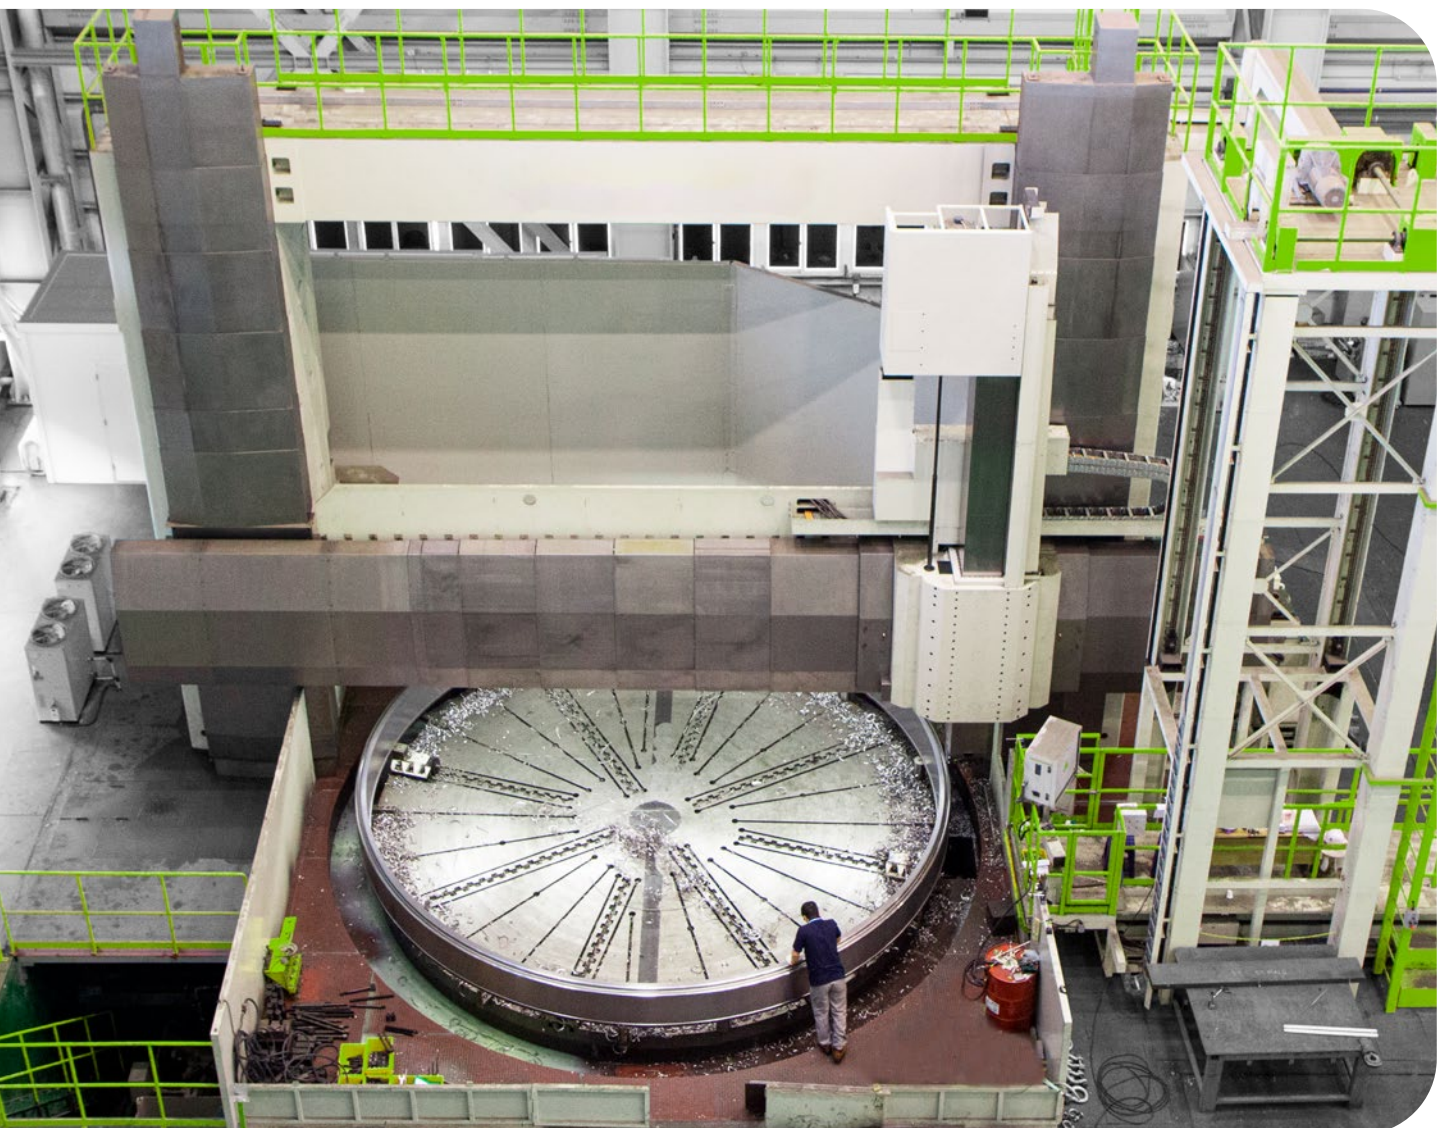

CNC Heavy Duty Vertical Turning Lathe

Applications

This machine has been designed for various kinds of workpieces in the industries like below.

상림엠에스피가 생산하는 vertical turning lathe로 다양한 분야의 제품을 최고의 품질로 가공할 수 있습니다.

Power Generation Industry

발전분야


- Shell for steam generator
- HP / LP casing
- Francis runner
- Reactor vessel
- Steam generator
- Bearing housing for wind power
- Main hub for wind power



Shipbuilding Industry

조선분야

- Propeller

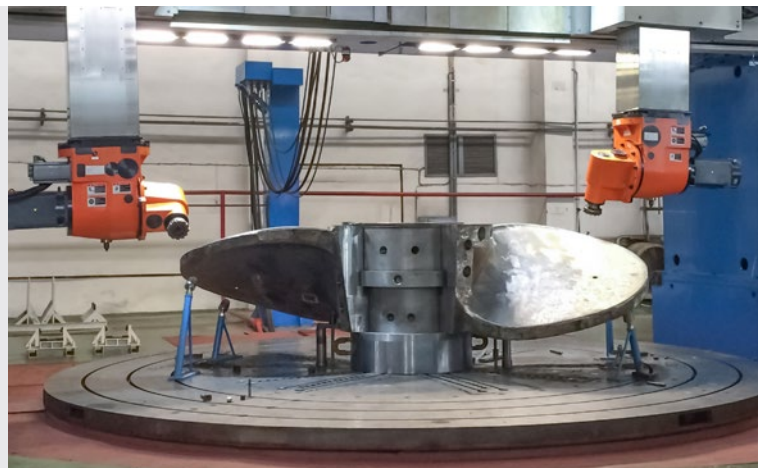

Cement Industry

시멘트분야

- Tire for cement mill
- Girth gear



CNC Heavy Duty Vertical Turning Lathe


Features

Cast Iron Structure



The main parts such as turning table, base, crossrail, crossbeam, column, and turning and milling head are made as cast iron to get rigid structure and high dimensional accuracy of the products. This stiff structure makes it possible to perform heavy duty machining.


주요 파트인 turning table, base, crossrail, crossbeam, column, turning and milling head는 주물로 제작되어 강성이 좋으며 제품의 고정밀도를 유지할 수 있고 강력 절삭에 알맞은 구조를 가지고 있습니다.

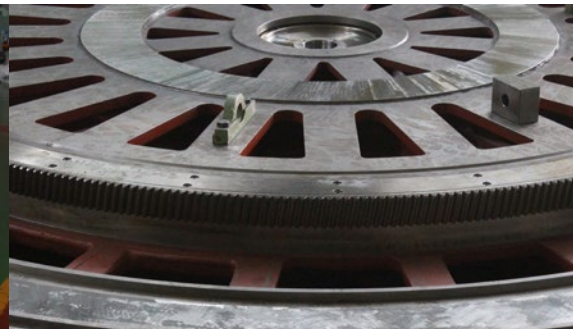

Hydrostatic Table Guide System

The material of hydrostatic pad is Alzen plate with good slipperiness, and hydrostatic pad has hydrostatic pockets. This hydrostatic system adopted "pump per pocket type" which has one (1) to one (1) connection between pocket and pump. Multi outlet pump supplies constant oil flow to the hydrostatic pockets, thus also makes constant oil gap. Through this system, table is not touching base directly, smooth driving is possible with only small frictional force. That means if the machine can keep the level (balance) normally, there is no wear on the slide ways.

Hydrostatic pad는 미끄러운 성질이 우수한 Alzen plate를 사용하고, 포켓과 펌프가 1:1로 연결되어 있는 "pump per pocket type" 방식을 채택하였습니다. Multi outlet pump는 일정한 유량을 포켓으로 전달하여 기름막을 형성시키고, 이런 시스템을 통해 table이 직접적으로 base와 접촉하는 것을 방지하여 마찰력이 거의 없는 상태로 부드럽게 구동 되게 합니다. 일반적으로 table의 부상량이 모든 구간에 걸쳐 일정할 경우 승동면의 마모는 없습니다.

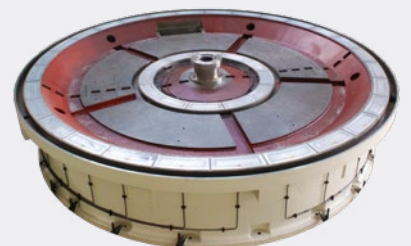

Automatic Synchronization System

For the vertical moving of the crossrail, feed drive equipped with two ball screws with high hardness and accuracy, two separate feed gear boxes and AC servo motors on each column. W1 & W2-axis enable to keep level continuously and to be done complete synchronization for these changing locations of crossrail through location adjusting function of NC control system.

Crossrail의 상하이송은 양쪽 column에 설치된 고정밀 고강성을 가진 ballscrew와 기어박스, AC servo motor를 통해 이동합니다. W1축과 W2축은 항상 수평을 유지하고, crossrail의 위치가 변함에 따라 NC control system의 위치보정 기능을 통해 완벽한 동기화를 구현합니다.



Crossrail moving and synchronization



Control System

Up-to-date control systems of Siemens and Fanuc are applicable.

Siemens와 Fanuc의 최신 컨트롤 시스템이 적용됩니다.



Features

Turning & Milling Head

Our turning & milling head has a special design for efficient heavy duty machining of the steel structures and parts, and guided by hydrostatic system inside of the ram housing. Ram is covered in housing to bear during heavy cutting and ram feeding executes by connected AC servo motor, spur gear and ballscrew. Double nut type ballscrew is applied in order to remove backlash and ram is designed for rapid traverse without load in spite of no counter balance cylinder.


상림 엠에스피의 turning & milling head는 철제구조의 강력 절삭을 효과적으로 하기 위해 디자인 되었으며, ram housing 내부에는 hydrostatic system으로 구성되어 있습니다. 강력절삭 시 발생하는 부하를 견디기 위해 ram이 housing 안에 들어가 있으며 AC servo motor, spur gear 그리고 ballscrew로 구동됩니다. Backlash를 제거하기 위해 double nut type ballscrew를 사용하며 counter balance cylinder 없이도 부하 없이 급속이동이 가능합니다

Specification


Specification	SVTL5060 (SVTM5060)	SVTL6070 (SVTM6070)	SVTL7085 (SVTM7085)	SVTL80100 (SVTM80100)
Ram section	400×400 mm (15×15 in.)		450×520 mm (17×20 in.)	
Spindle motor power			37 ~ 60 kW (49 ~ 80 Hp)	
Ram stroke		2,000 ~ 3,000 mm (78 ~ 118 in.)		2,000 ~ 4,000 mm (78 ~ 157 in.)

Torque Diagram

+ DVTM7085 Milling Head

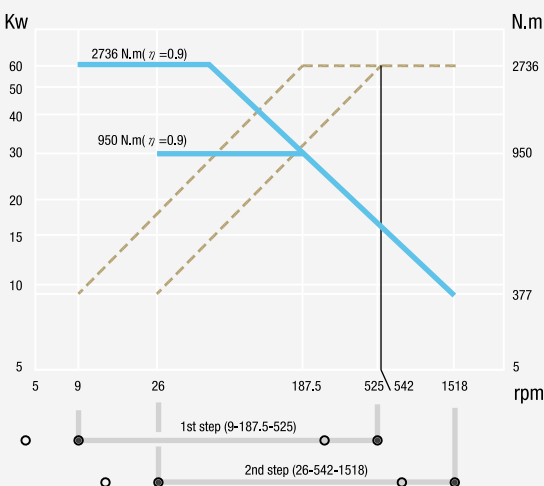

+ DVTM7085 Turning Table

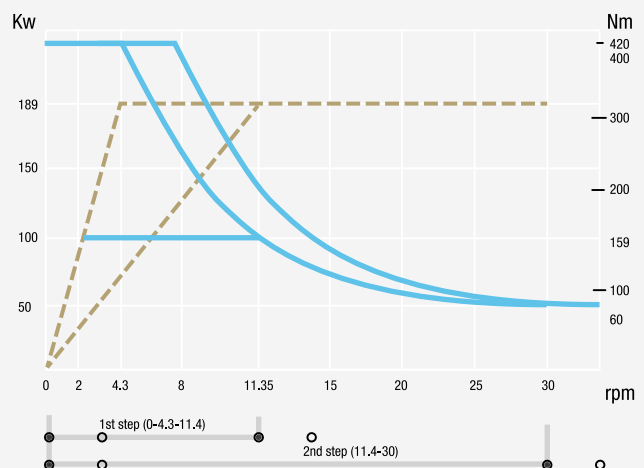

CNC Heavy Duty Vertical Turning Lathe

Accessories

Attachment

Several types of the attachments for additional machining work in large size machine tools such as straight attachment, angle attachment, universal attachment and special attachment which is customized by the request of the customer can be supplied by SANGNIM MSP.


대형 공작기계에 장착하여 추가적인 가공작업을 하기 위한 attachment를 공급하고 있으며, 그 종류로는 straight attachment, angle attachment, universal attachment, 그리고 고객의 요구에 의해 customizing 된 special attachment도 공급하고 있습니다.



ATC (Automatic Tool Changer)

C-axis Table Indexing Function Automatic tool changer is installed at the right or left side of the machine for efficient operating and machining, and has ISO 50 taper. Tools can be mounted on and dismantled from tool gripper even during machining.

효율적인 장비 운용과 가공을 위해 장비의 측면에 자동공구교환장치가 설치될 수 있으며, ISO 50 taper를 사용할 수 있습니다. 가공 중에도 공구를 교환할 수 있어 가공 중에 발생하는 시간손실을 줄일 수 있습니다.

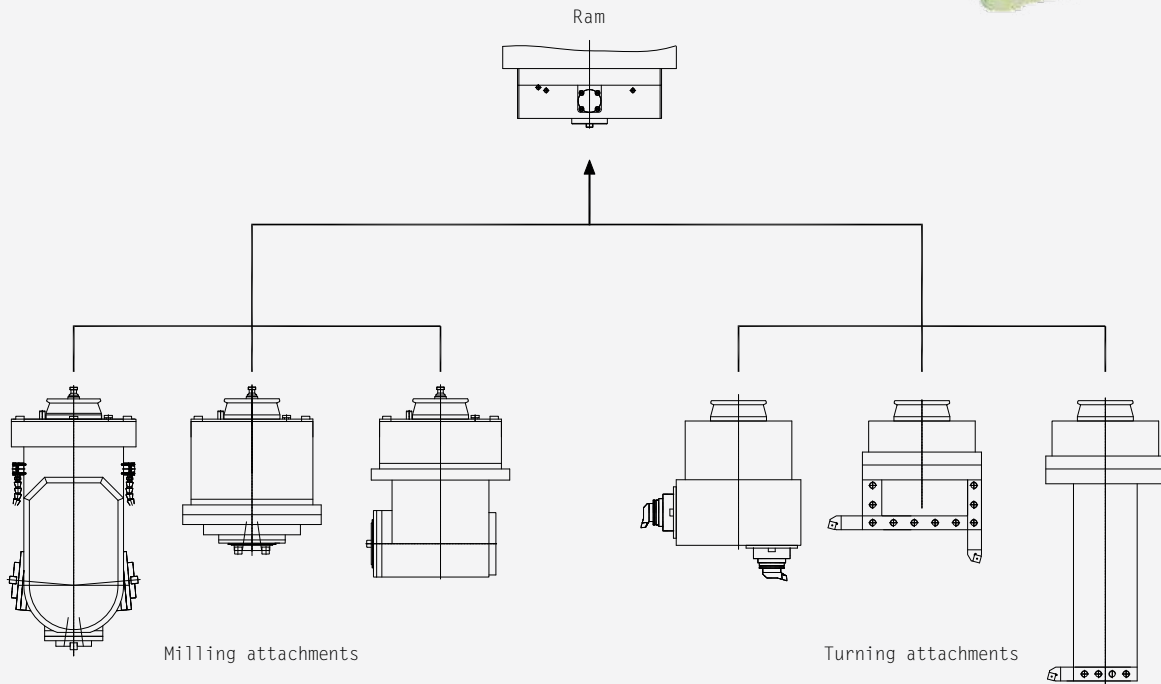

C-axis Table Indexing Function

C-axis table indexing function can be added to the turning table for milling machining of the workpiece. The graduation of indexing is 0.001° .

소재에 milling 작업이 필요할 경우, C축 기능을 turning table에 장착할 수 있으며 indexing 각도는 0.001° 입니다.

Specification


	Specification	SVTL5060 (SVTM5060)
Capacity	Max. turning diameter (A)	6,000 mm (236 in.)
	Table diameter (B)	5,000 mm (196 in.)
	Max. turning height (C)	3,000 ~ 6,000 mm (118 ~ 236 in.)
Stroke	X-axis (D)	3,200 mm (125 in.)
	Z-axis (E)	2,000 ~ 3,000 mm (78 ~ 118 in.)
	W-axis (F)	2,000 ~ 5,000 mm (78 ~ 196 in.)
Feed rate	X-axis	15,000 mm/min (590 in./min)
	Z-axis	10,000 mm/min (393 in./min)
	W-axis	2,000 mm/min (78 in./min)
Milling spindle	Spindle motor power	37~ 60 kW (49 ~ 80 Hp)
	Spindle speed	1,500 / 2,000 rpm
	Ram section	400 x 400 mm (15 x 15 in.)
Turning table	Motor power	100 ~ 150 kW (134 ~ 201 Hp)
	Max. turning speed	30 (50)rpm
	Max. workpiece weight	100 ~ 150 tons (220,000 ~ 330,000 lbs)
Control system		Siemens / Fanuc
Measuring system		Haidenhain / Fagor

Basic Accessories



- 4 chucking jaw units
- X, W-axis telescopic cover
- Patrol lamp (red, green, yellow)
- Leveling block & anchor bolt
- Turning tool holder
- Boring bar

Optional Accessories

- Coolant supply unit (internal / external)
- Chip conveyor
- C-axis function
- Milling head
- Automatic tool changer
- Automatic attachment changer
- Attachment
- Adapter
- Extractable and independent operator platform
- Renishaw probe system
- Laser tool measurement system
- Machine tools monitoring system (black box)
- Industrial camera with recorder

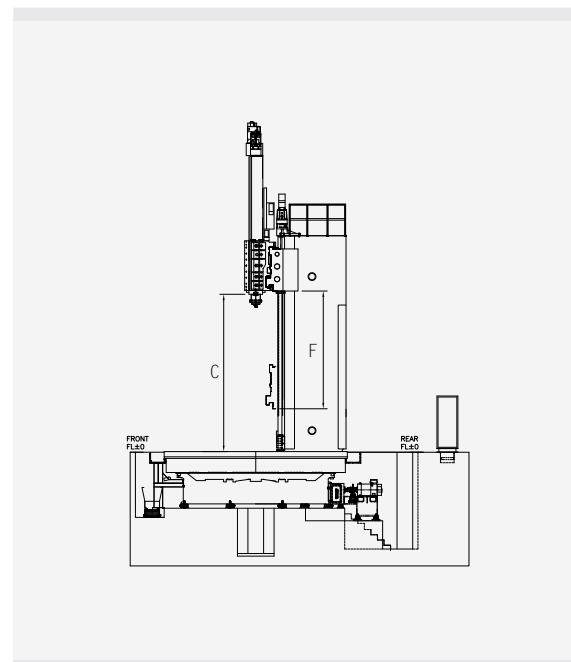

SVTL6070 (SVTM6070)	SVTL7085 (SVTM7085)	SVTL80100 (SVTM80100)
7,000 mm (275 in.)	8,500 mm (334 in.)	10,000 mm (393 in.)
6,000 mm (236 in.)	7,000 mm (275 in.)	8,000 mm (314 in.)
3,000 ~ 6,000 mm (118 ~ 236 in.)	4,000 ~ 9,000 mm (157 ~ 354 in.)	
3,700 mm (145 in.)	4,450 mm (175 in.)	5,200 mm (204 in.)
2,000 ~ 3,000 mm (78 ~ 118 in.)	2,000 ~ 4,000 mm (78 ~ 157 in.)	
2,000 ~ 5,000 mm (78 ~ 196 in.)	3,000 ~ 7,000 mm (118 ~ 275 in.)	
15,000 mm/min (590 in./min)		
10,000 mm/min (393 in./min)		
2,000 mm/min (78 in./min)		
37~ 60 kW (49 ~ 80 Hp)		
1,500 / 2,000 rpm		
450 x 520 mm (17 x 20 in.)		
100 ~ 150 kW (134 ~ 201 Hp)	150 ~ 200 kW (201 ~ 268 hp)	
30 (50) rpm	20 (30) rpm	
100 ~ 200 tons (220,000 ~ 440,000 lbs)	150 ~ 400 tons (330,000 ~ 880,000 lbs)	
Siemens / Fanuc		
Haidenhain / Fagor		

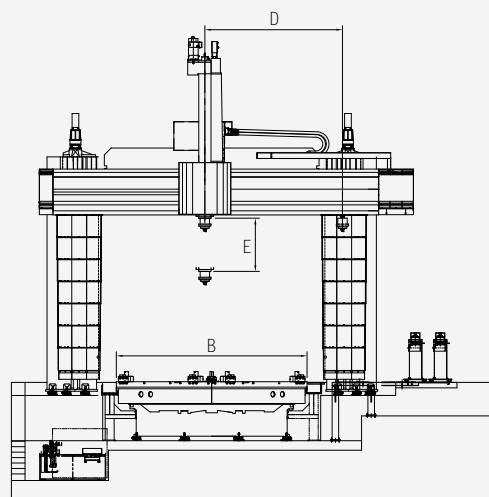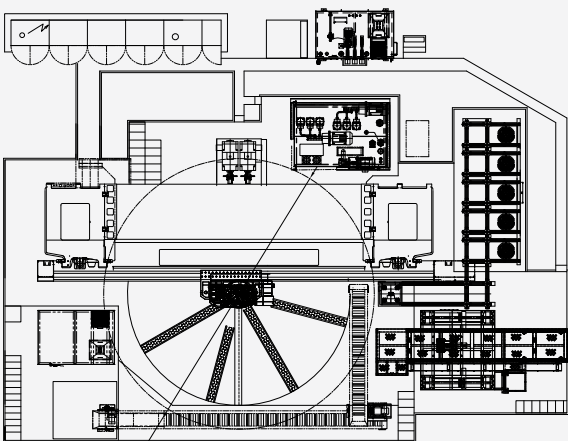



QR 코드를 스캔해보세요
Scan QR code and visit our website.
www.sangnim.com

SANGNIM Machine Tool & Service Provider



Head Office and Factory 본사 및 공장 :
경상남도 창원시 성산구 성산패총로32
32, Seongsanpaechong-ro, Seongsan-gu, Changwon-si,
Gyeongsangnam-do, Republic of Korea
TEL : +82 55-287-1534
FAX : +82 55-287-1535
E-mail : sangnim@sangnim.com



Shanghai office 上海悦农贸易有限公司 :
17-201 Room, No. 595, Yongtai Road, Shanghai, China (PC -200123)
Mobile: 0086-15921634117
E-mail: marineofchina@163.com

